

# NEWSTAR

## Floor Springs - Double & Single Action

**322**

SSS PSS PB

### Floor Spring with Interchangeable Spindle and adjustable backcheck.

Door Widths from 850mm to 1100mm.

Door Weights up to 100kg.

Suitable for use in temperatures from -15 to 40 Degrees Celsius.

Adjustments include;

1. Latching Speed. Final 10 Degrees.
2. Closing Speed. 10 - 130 Degrees.
3. Spring Strength. BS Size 3.
4. Adjustable Back Check. 70 - 85 degrees.
5. Delayed Action. Not Available.
6. Hold Open. Not Suitable for FR60.
7. Specify Hold Open if required.

Available Accessories;

1. Double Action.
2. Single Action. Max opening 130°

The concrete box which houses the mechanism is uniquely only 40mm deep. (306 x 108 x 40mm.)

Top plate dimension 324 x 130mm.

FR 60 EN

### Mechanism



### Top Plates



### Double Action Accessories



### Single Action Accessories





### 314.EMHO

SSS PSS PB

#### Floor Spring with Interchangeable Spindle Electro Mechanical hold open.

Door Widths from 750mm to 1100mm.

Door Weights up to 100kg.

Suitable for use in temperatures from -15 to 40 Degrees Celsius.

Adjustments include;

1. Latching Speed. Centering Action.
2. Closing Speed. 10 - 165 Degrees.
3. Spring Strength. BS Size 4.
4. Power requirement. 24vDC 95mA.
5. Maximum Angle to Hold Open 165 Degrees.
6. EMHO PSU available.

Available Accessories;

1. Double Action.
2. Single Action.

The concrete box which houses the mechanism. (306 x 78 x 60mm.)


Top plate dimension 324 x 106 x 1.5mm.



#### Mechanism



#### Top Plates

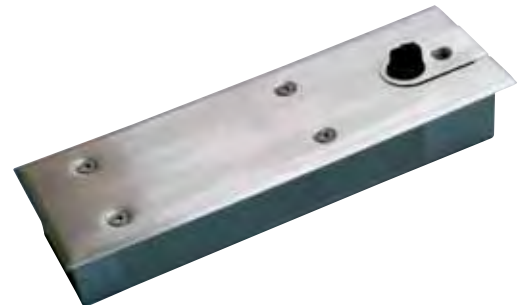

#### Double Action Accessories



#### Single Action Accessories

