

NEWSTAR

Floor Springs - Double & Single Action

322

SSS PSS PB

Floor Spring with Interchangeable Spindle and adjustable backcheck.

Door Widths from 850mm to 1100mm.

Door Weights up to 100kg.

Suitable for use in temperatures from -15 to 40 Degrees Celsius.

Adjustments include;

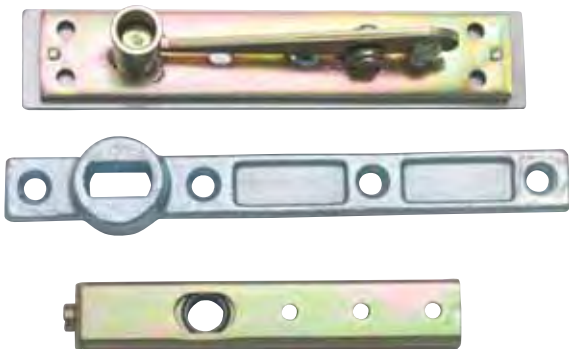
1. Latching Speed. Final 10 Degrees.
2. Closing Speed. 10 - 130 Degrees.
3. Spring Strength. BS Size 3.
4. Adjustable Back Check. 70 - 85 degrees.
5. Delayed Action. Not Available.
6. Hold Open. Not Suitable for FR60.
7. Specify Hold Open if required.

Available Accessories;

1. Double Action.
2. Single Action. Max opening 130°

The concrete box which houses the mechanism is uniquely only 40mm deep. (306 x 108 x 40mm.)

Top plate dimension 324 x 130mm.

FR
60 EN**Mechanism****Top Plates****Double Action Accessories****Single Action Accessories**



314.EMHO

SSS PSS PB

Floor Spring with Interchangeable Spindle Electro Mechanical hold open.

Door Widths from 750mm to 1100mm.

Door Weights up to 100kg.

Suitable for use in temperatures from -15 to 40 Degrees Celsius.

Adjustments include;

1. Latching Speed. Centering Action.
2. Closing Speed. 10 - 165 Degrees.
3. Spring Strength. BS Size 4.
4. Power requirement. 24vDC 95mA.
5. Maximum Angle to Hold Open 165 Degrees.
6. EMHO PSU available.

Available Accessories;

1. Double Action.
2. Single Action.

The concrete box which houses the mechanism. (306 x 78 x 60mm.)

Top plate dimension 324 x 106 x 1.5mm.



Mechanism



Top Plates



Double Action Accessories



Single Action Accessories

