



NEWSTAR


DOOR SELECTOR

Applicable Dimensions


Type	Max. Door Dimensions
Centre Hung	D.W.2100mm
Offset Hung	D.W.1300mm

Warning

If angle of selector is set below 90° then the unit will become damaged and warranty invalid.

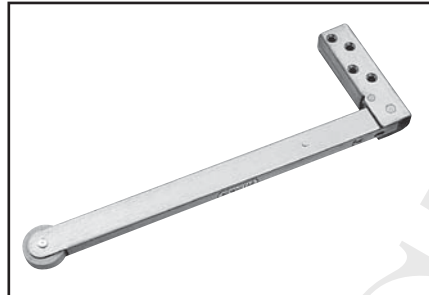

Door Selector: SF.250F
Available in finishes SSS PSS PB

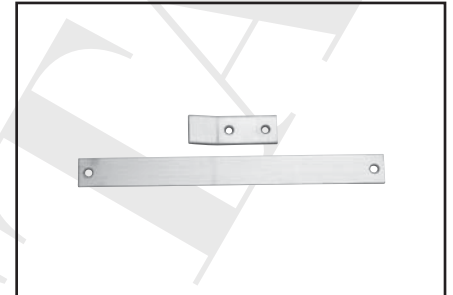

Rubbing Plates: RP1
Available in finishes SSS PSS PB

Metal Door Installation

Adjustment

When the supporting angle of the lever is not satisfactory, due to irregular door widths or any gap at the meeting centre of the doors, adjustments can be made by turning the adjusting screw ① and locking screw ② at the base of the lever to fix position. Release ② prior to adjustment of ①.

Wood Door Installation

Adjustment

When the supporting angle of the lever is not satisfactory, due to irregular door widths or any gap at the meeting centre of the doors, adjustments can be made by turning the adjusting screw ① and locking screw ② at the base of the lever to fix position. Release ② prior to adjustment of ①.

Please note that rubbing plates are ordered separately